




### OPTION 4 - OVERALL




Bike Lanes, 7' wide (typical)

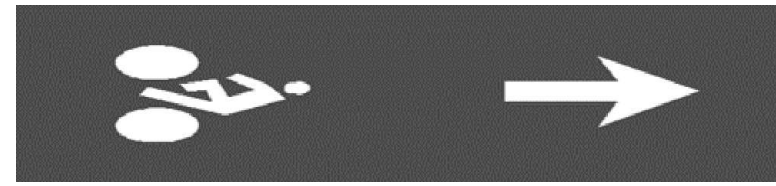

Sidewalk-level multi-use path, 15' wide minimum



Sidewalk-level buffer/amenity strip, 5' minimum

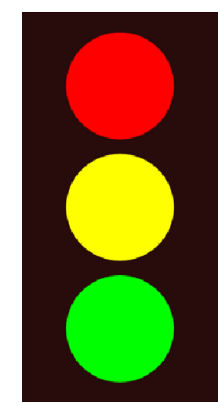

Existing traffic signal (unwarranted signals may be recommended for removal)



Existing bus stop (details for transit waiting environment to be developed)